
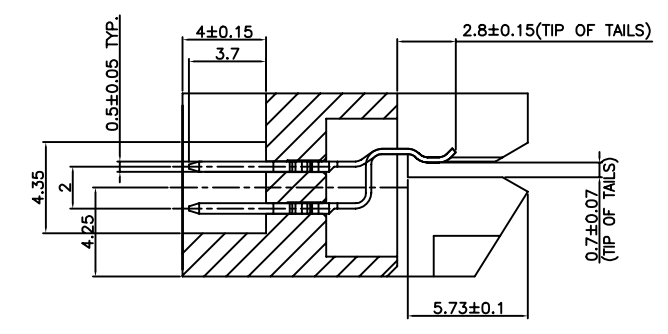
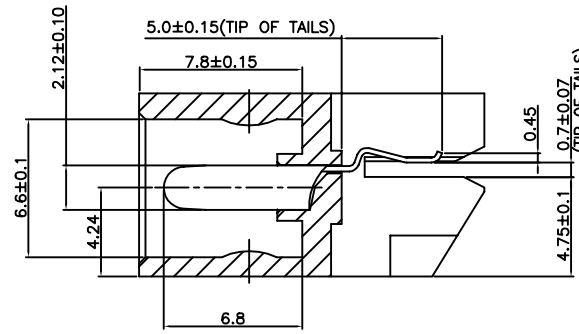


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.


CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
A	HK2129	RELEASE TO RPRODUCTION	1/7/02	IP
B	HK2194	ADD PCB LAYOUT; REVISE TOLERANCES	4/17/02	IP

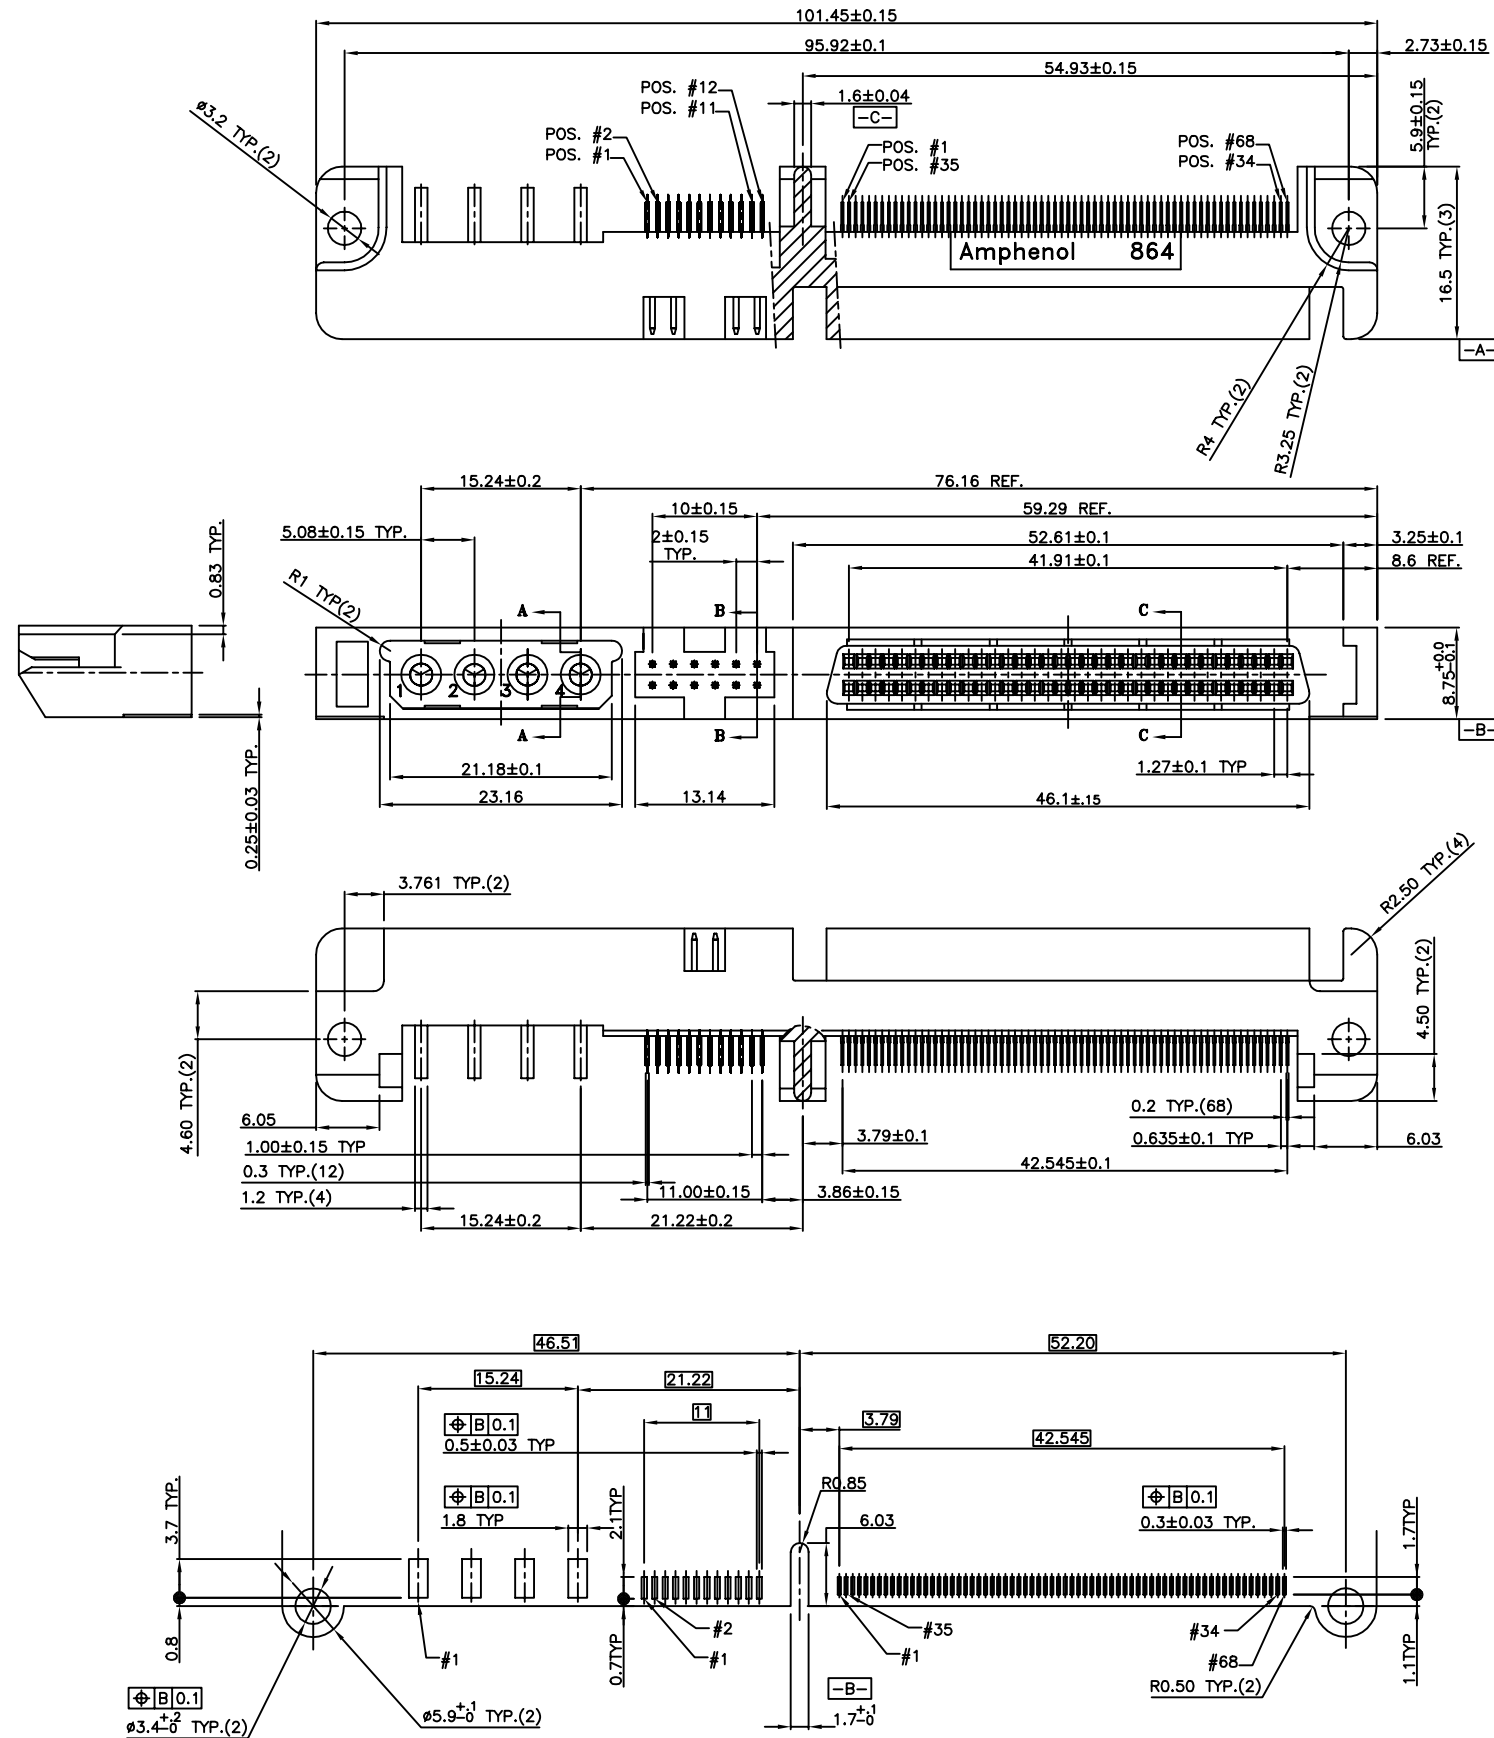

SECTION A-A

SECTION B-B

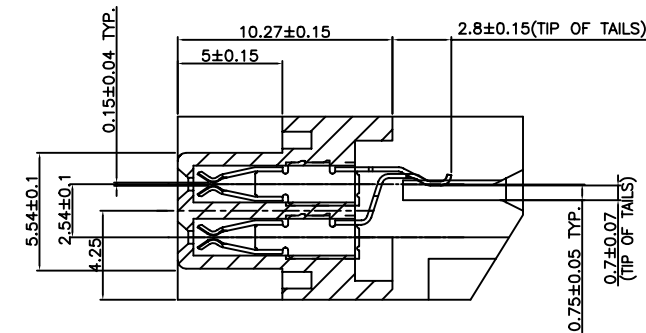

SECTION C-C

Notes:

- INSULATOR MATERIAL : PA6T, BLACK, UL94V-0
- POWER CONTACT MATERIAL : BRASS, TIN PLATED 1.0um MIN OVER 1.27um MIN NICKEL.
- SIGNAL CONTACT MATERIAL : PHOSPHOR BRONZE, 0.2um MIN GOLD PLATED ON MATING AREA, TIN-LEAD PLATED 1.27um MIN OVER 1.27um MIN NICKEL ON TAIL.
- CONTACT RETENTION : 2 LBS, POWER CONTACTS
2 LBS, SIGNAL CONTACTS
- ELECTRICAL REQUIREMENTS:
 - A. OPERATING VOLATAGE : 750 VDC
 - B. CURRENT RATING : 3 AMPS, POWER CONTACTS
1 AMPS, SIGNAL CONTACTS
 - C. INSULATION RESISTANCE : 5000 MEGAOHMS MIN
 - D. CONTACT RESISTANCE : 25 MILI-OHMS
- OPERATION TEMPERATURE : -55 C TO +150 C.

UNLESS OTHERWISE SPECIFIED TOLERANCES	U.S.	METRIC	APPROVAL	DATE	Amphenol
	.X +/-	0.20			
.XX +/-	0.20	CHECKED Raymond	4/17/02	TITLE	WIDE-SCSI STRADDLE ASSEMBLY
.XXX +/-	1°	CHECKED		SIZE	
FRACTIONS +/-				SCALE	NONE
ANGLES +/-				SHEET	
FOR MATERIALS AND FINISHES SEE NOTES	DRAWING FILE : \DRAWING\COMBO\C8499005.DWG		ANGLE OF PROJECTION	REV.	B
REMOVE SHARP EDGES					
DIMENSIONS	U.S.	INCHES			
	METRIC	MM			

RECOMMENDED MOUNTING LAYOUT
TOLERANCES UNLESS OTHERWISE ±0.1mm